Bronte SLSC 2D physical modelling

WRL TR 2024/16, July 2024

By J W Chan and I R Coghlan

UNSW

List of tables

Table 3.1 Model scale ratio 4
Table 3.2 Wave measurement locations 12
Table 4.1 Design wave conditions 18
Table 4.2 Measured wave climate conditions at the Offshore, Nearshore and Structure locations and total water level at the Structure 20
Table 5.1 Mean overtopping rates for seawall configurations 21
Table 5.2 Overtopping volumes for individual overtopping events 24
Table 5.3 Summary of wave loading results 28

List of figures

Figure 1.1 Aerial photo of the project site (Nearmap 03 October 2023) [Source: RHDHV, 2023] 1
Figure 1.2 Overview of two seawalls to be modelled and tested: Vertical Seawall with Wave Deflector (“Seawall 2”) and Stepped Seawall (“Seawall 1”) [Source: RHDHV, 2023] 2
Figure 3.1 Location of the bathymetry transect (red line) provided by RHDHV and modelled by WRL, and the location of the wave paddle (blue rectangle) relative to the structure 6
Figure 3.2 Modelled bathymetries: eroded and 1V:10H ramp (waves travelling in a direction from right to left) 7
Figure 3.3 Modelled bathymetries: eroded and 1V:10H ramp (detailed view at structure) 8
Figure 3.4 Accreted and indicative eroded profiles 9
Figure 3.5 Vertical Seawall with Wave Deflector (eroded profile) 10
Figure 3.6 Vertical Seawall with Wave Deflector (accreted profile) 10
Figure 3.7 Stepped seawall (eroded profile) 11
Figure 3.8 Stepped seawall (accreted profile) 11
Figure 3.9 Arrangement for measurement of overtopping 13
Figure 3.10 Cumulative overtopping timeseries and the largest overtopping volume (V_{max}) extracted from the filtered overtopping timeseries (top) for Test 1 – Vertical Seawall with Wave Deflector, 20 year ARI waves and 2093 planning period 14
Figure 3.11 Load testing arrangement for the Vertical Seawall with Wave Deflector (all dimensions in metres) 15
Figure 3.12 Landward view of flume arrangement for wave load testing 16
Figure 3.13 Side view of flume arrangement for wave load testing 16
Figure 5.1 Comparison of mean overtopping rates for the Vertical Seawall with Wave Deflector and Stepped Seawall structures 22
Figure 5.2 Comparison of mean overtopping rates for the Vertical Seawall with Wave Deflector with a fully eroded profile and an accreted (1V:10H rampRl ampRl62(1)-9.000008871 0 595.32 842.04

Figure 5.3 Comparison of overtopping timeseries for the Vertical Seawall with Wave Deflector and Stepped Seawall structures 25
Figure 5.4 Comparison of overtopping timeseries for the Vertical Seawall with Wave Deflector structure with a fully eroded profile and an accreted (1V:10H ramp) profile 25
Figure 5.5 Image sequence comparison of V_{max} event (18,700 L/m) for the Stepped Seawall (left) [Test 9] and the V_{max} event (10,000 L/m) for the Vertical Seawall with Wave Deflector (right) [Test 4] subject to Design Condition 1 26
Figure 5.6 Image sequence comparison of V_{max} event (13,000 L/m) for the accreted profile (left) [Test 2] and the V_{max} event (20,300 L/m) for the eroded profile (right) [Test 1] with the Vertical Seawall with Wave Deflector structure subject to Design Condition 3 27
Figure 5.7 Total force timeseries for the wave deflector 28
Figure 5.8 F_{max} event (195 kN/m) for the wave deflector 29
Figure 5.9 Image sequence of the F_{max} event (195 kN/m) at 3,087 s on the wave deflector during repeat of Test 10 29
Figure 5.10 Total force timeseries for the 1.2 m high section of SLSC building wall 30
Figure 5.11 F_{max} event (53 kN/m) for the 1.2 m high section of SLSC building wall 30
Figure 5.12 Image sequence of the Fmax event (53 kN/m) at 2,590 s on the SLSC building wall for the repeat test 31

1 Introduction

Bronte Surf Life Saving Club (SLSC) in Sydney (NSW) is proposed for redevelopment. As part of this redevelopment, coastal protection structures will be constructed to protect the SLSC over its design life. The Water Research Laboratory (WRL) of the School of Civil and Environmental Engineering at UNSW Sydney was engaged by Haskoning Australia (RHDHV) to undertake two-dimensional (2D) physical modelling of two seawall cross-section designs proposed for sections of the foreshore fronting Bronte SLSC.

An aerial photo of the project site is provided in Figure 1.1 and an overview of the seawalls to be modelled and tested is shown in Figure 1.2

Figure

2 Study objectives

WRL and RHDHV developed a physical modelling program to assess wave overtopping and design wave loading behaviour for the site, previously described using desktop methods and reported in RHDHV's Concept Design and Coastal Engineering Assessment Report (RHDHV, 2024a).

The adopted physical modelling approach focused on wave overtopping flow impacts on the SLSC precinct and, while ultimately not required during the program, this approach allowed potential

).

3 Model setup and operation

3.1 Testing facility

The physical modelling program was carried out in WRL's 0.9 m wide wave flume. The flume's dimensions are 36 m (length) by 0.9 m (width) by 1.6 m (height). The flume walls are primarily constructed of rendered and painted blockwork, with the exception of a glass panelled section through which visual observations can be made. The permanent floor of the flume is constructed of concrete. A false floor constructed from plywood was used to represent the model bathymetry (see Section 3.3.1). A figure of the complete flume setup with dimensions is provided in Appendix A.

The flume has a piston type wave generator powered by an electric wave making system. This system is capable of generating

To test the sensitivity of wave overtopping to the state of the beach at the peak of a storm, a representative accreted profile was also constructed seaward of the structures (as a modification of the base, eroded profile; green line in Figure 3.2 and Figure 3.3). This comprised a 1V:10H ramp profile extending from the eroded profile at -0.7 m AHD until intersecting with the structure at 4.2 m AHD for the Vertical Seawall with Wave Deflector and at 4.4 m AHD for the Stepped Seawall.

A 3 m long dissipative beach made out of reticulated foam was fitted across the back wall (landward end) of the flume to minimise reflections during wave climate calibration and testing.

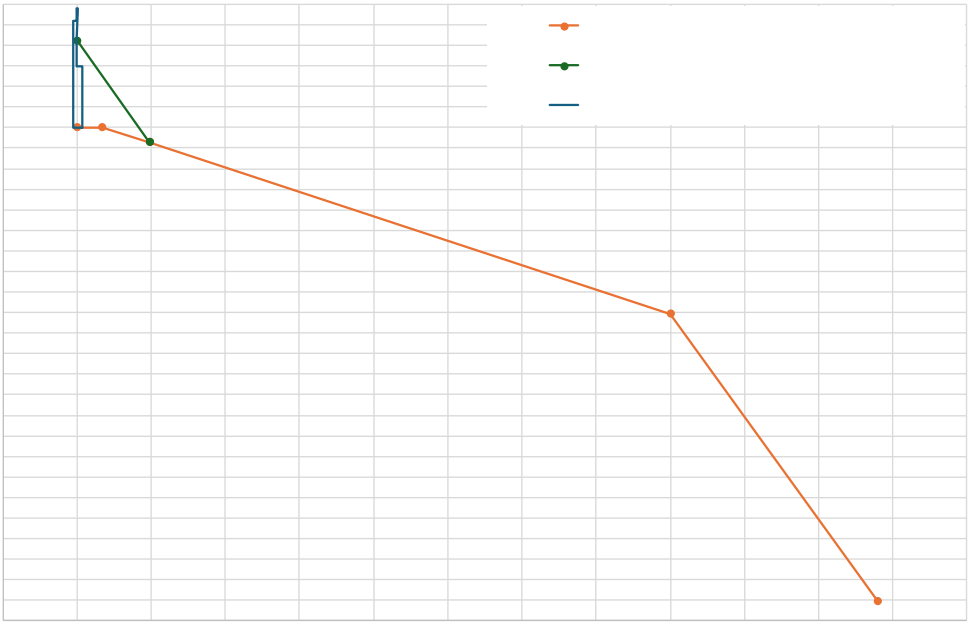

Figure 3.2 Modelled bathymetries: eroded and 1V:10H ramp (waves travelling in a direction from right to left)

Figure 3.3 Modelled bathymetries: eroded and 1V:10H ramp (detailed view at structure)

3.3.2 Model structures

Figure 3.5 Vertical Seawall with Wave Deflector (eroded profile)

Figure 3.6 Vertical Seawall with Wave Deflector (accreted profile)

Figure 3.9 Arrangement for measurement of overtopping

If the volume of overtopping approached the capacity of the catch tray, the water in the catch tray was pumped out, volumetrically measured and tallied to give a cumulative overtopping volume for the test duration. This setup allowed the measurement of mean overtopping discharge, *q* (L/s per m of crest length). *q* was calculated by dividing the total volume of water that overtopped the structure, by the duration of the test and normalised by the tested length of crest (16.2 m).

Individual overtopping events were also estimated by measuring the volume of water to overtop the crest during large individual wave overtopping occurrenlf 8a8g l33[(F)-2(igu)BT/F1 0.0302ave approached the capacity

Figure 3.10 Cumulative overtopping timeseries and the largest overtopping volume (V_{max}) extracted from the filtered overtopping timeseries (top) for Test 1 – Vertical Seawall with Wave Deflector, 20 year ARI waves and 2093 planning period

The measured overtopping rates do not allow for the effects of wind due to the complexities that this would introduce into the model setup, however, wind has been shown to have an impact on actual overtopping rates that occur. Adjustments for wind effects can be undertaken using techniques from USACE (2006).

3.4.3 Wave loads

Wave load testing was conducted on the wave deflector and a 1.2 m high section of the SLSC building wall for the Vertical Seawall with Wave Deflector structure. The wave deflector and SLSC building wall load test sections were both 8.1 m wide and were offset in the alongshore direction, to minimise any influence from the presence of the three-dimensional (3D) load cell (attached to the wave deflector) on direct overtopping impacting the SLSC building wall. To prevent overtopping water from remaining pooled between the deflector and the SLSC building wall (as it is expected to drain laterally in the real-world), the model SLSC building wall did not occupy the full flume width to allow drainage pathways either side of it, as indicated in Figure 3.12.

Figure 3.12 Landward view of flume arrangement for wave load testing

Figure 3.13 Side view of flume arrangement for wave load testing

A dynamic in-situ “push test” was completed using a separate uni-directional load cell, to quantify mechanical losses in the load-sensing section of the structure, and to verify that all forces were being correctly distributed through the instrument rig. The extent of instrumentation noise relative to typical loads measured in the wave flume was also assessed during the “push test”.

On the basis of these sensor-setup verification tests, a 10% uncertainty factor was applied to all provided load measurements in this report to allow for accuracy limitations in the model setup (i.e. all measured forces have been multiplied by 1.1).

3.4.4 Media and data files sharing

Recorded data, including overtopping timeseries, wave load time series and videos for all conducted flume tests were provided to RHDHV in a secured OneDrive folder.

Individual media folders were created for each test and typically included:

Two side view (close and far) videos of the full test duration
10 second videos of the three largest overtopping or wave load events
Overtopping or wave load timeseries

4 Wave climate calibration

4.1

At the adopted scale of 1:27, the largest offshore $H_{1/3}$ that could be produced in the physical model at the wave maker was approximately 6.0 m. As this maximum achievable offshore Hs condition was less than the target offshore design conditions for the proposed 20, 100 and 500 year ARI events, WRL raised the test still water level to account for the reduced nearshore wave setup generated in the wave flume. This was necessary due to the fact that nearshore wave conditions (i.e. close to the proposed seawall toe) were depth limited and, as such, the wave height at the seawall was strongly dependent on the total water depth including wave setup.

(4.3)

(4.4)

Following this approach, WRL matched the TWL at 0 m AHD to within 0.02 m of the target TWL for the 20, 100 and 500 year ARI conditions. Wave climate statistics at the Offshore, Nearshore and Structure locations are presented in Table 4.2.

Table 4.2 Measured wave climate conditions at the Offshore, Nearshore and Structure locations and total water level at the Structure

WRL design cond. #	Target Offshore (-23 m AHD)		WRL Measured Offshore (-23 m AHD)		Nearshore (-5 m AHD)		Structure (0 m AHD)		TWL at Structure (0 m AHD)	
	$H_{1/3}$ (m)	T_P (s)	$H_{1/3}$ (m)	T_{P1}* (s)	$H_{1/3}$ (m)	T_{P1}* (s)	$H_{1/3}$ (m)	T_Z** (s)	Target (m AHD)	Measured (m AHD)
1	5.8	13.4	5.8	13.3	3.1	13.3	0.6	7 BDC		

5 Results

5.1 Overtopping results

5.1.1

Table 5.2 Overtopping volumes for individual overtopping events

RHDHV test ref. #	Structure	Bathymetry

Figure 5.3 Comparison of overtopping timeseries for the Vertical Seawall with Wave Deflector and Stepped Seawall structures

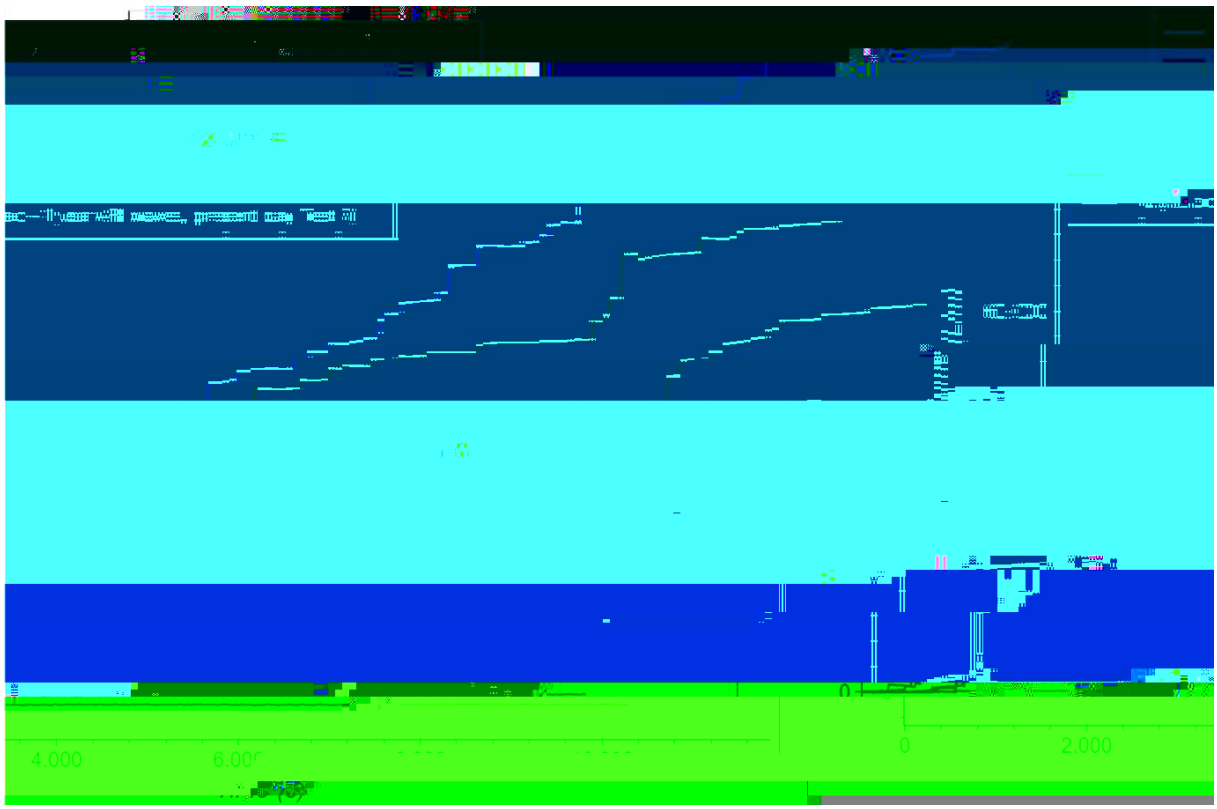

Figure 5.4 Comparison of overtopping timeseries for the Vertical Seawall with Wave Deflector structure with a fully eroded profile and an accreted (1V:10H ramp) profile

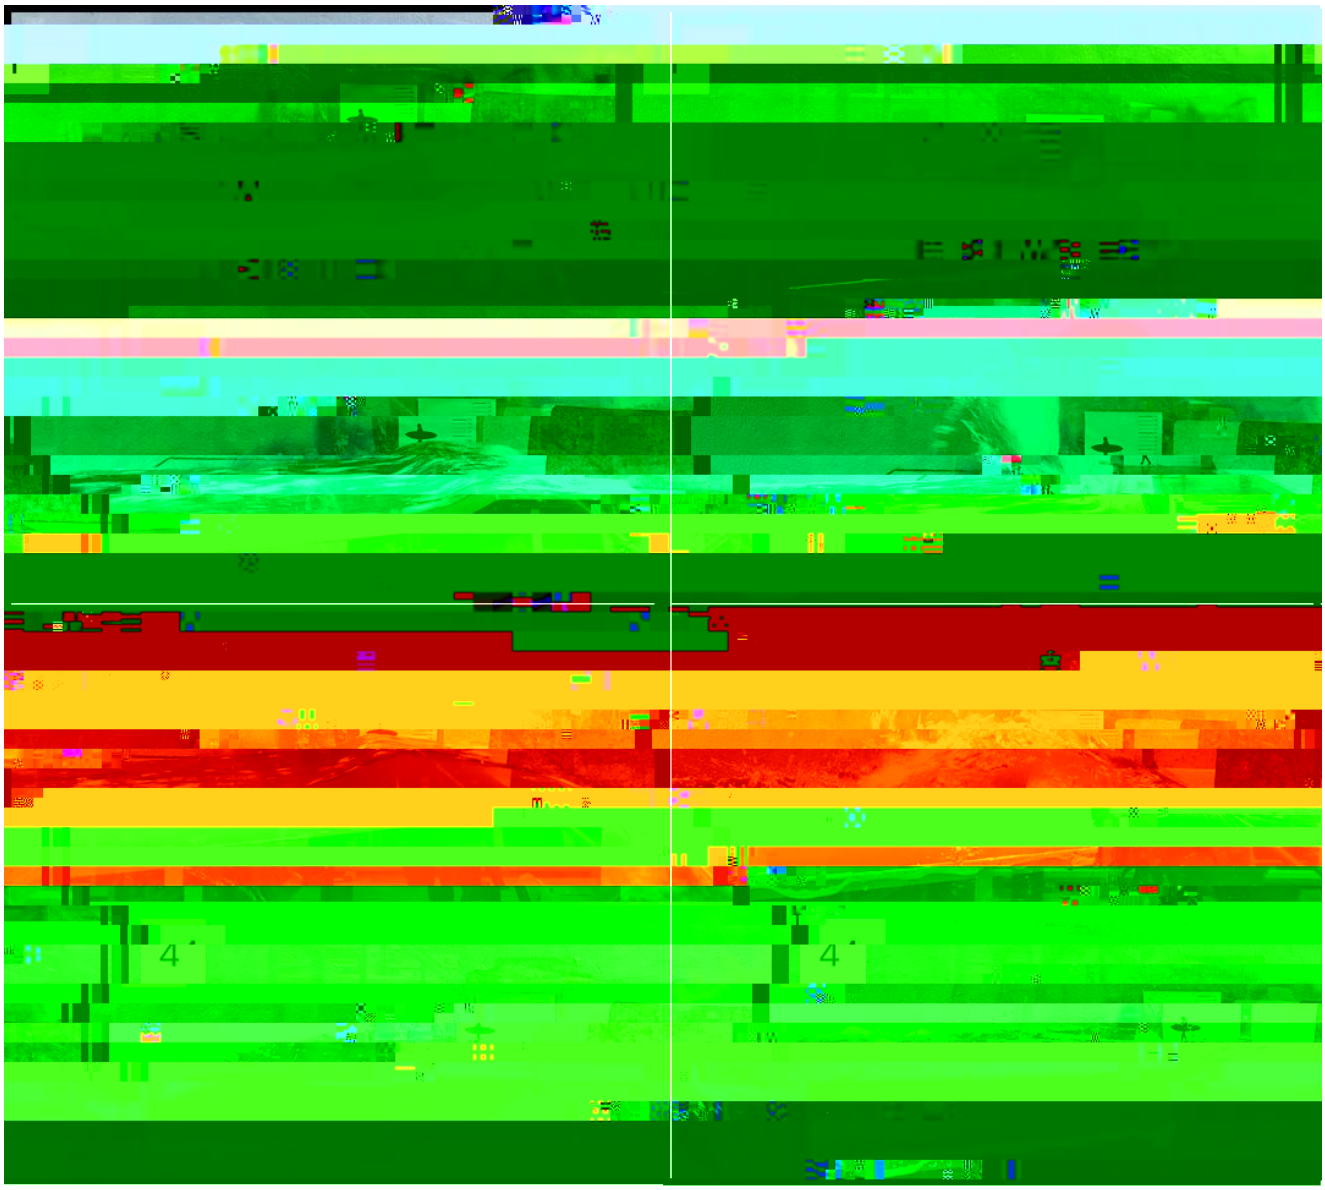

Figure 5.5 Image sequence comparison of V_{max} event (18,700 L/m) for the Stepped Seawall (left) [Test 9] and the V_{max} event (10,000 L/m) for the Vertical Seawall with Wave Deflector (right) [Test 4] subject to Design Condition 1

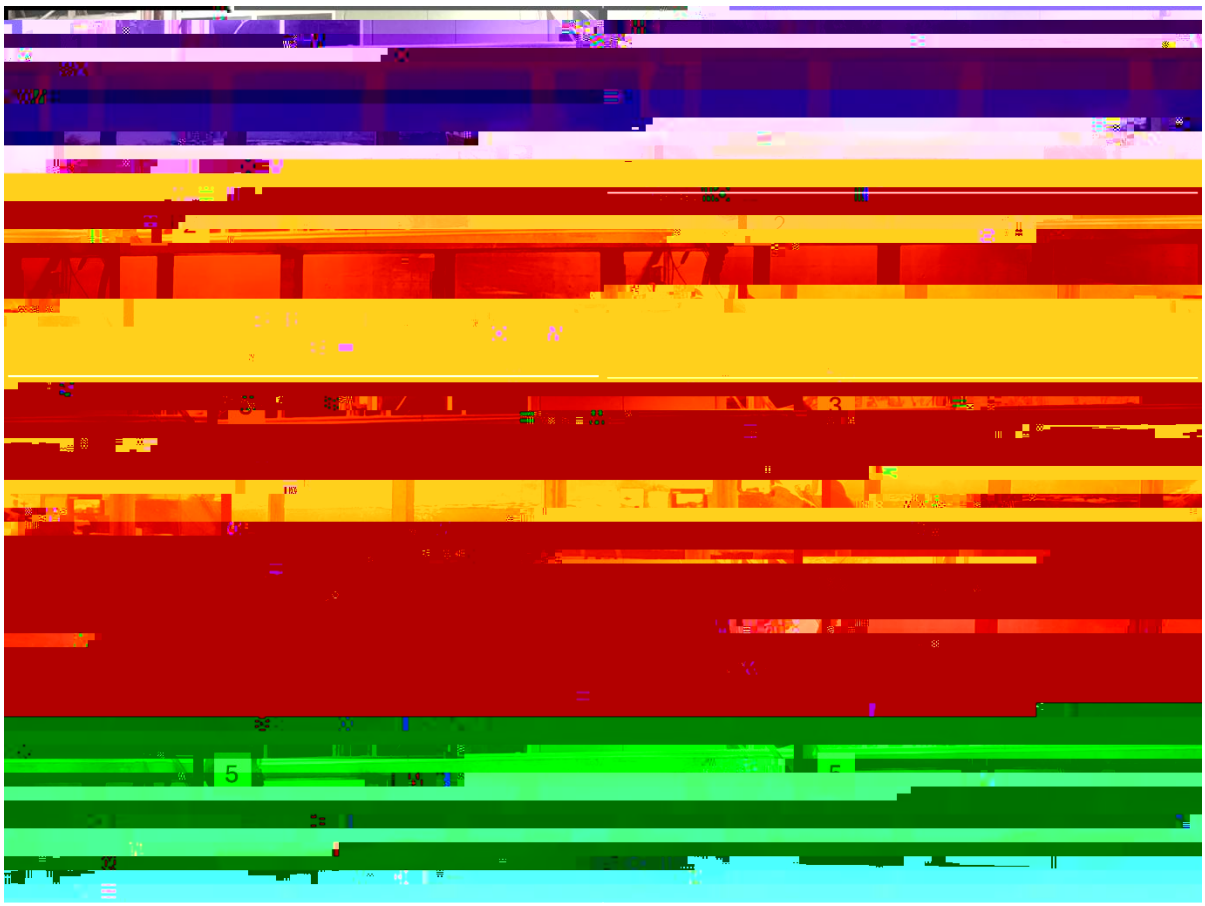

Figure 5.6 Image sequence comparison of V_{max} event (13,000 L/m) for the accreted profile (left) [Test 2] and the V_{max} event (20,300 L/m) for the eroded profile (right) [Test 1] with the Vertical Seawall with Wave Deflector structure subject to Design Condition 3

5.2 Wave loading results

A single load test (Test 10) was conducted on 8.1 m wide sections of the wave deflector and the SLSC building wall for the Vertical Seawall with Wave Deflector Structure, subject to Design Condition 6 - *500 year ARI waves and 2093 planning period*. A summary of load test results including the largest force measured (F_{max}) on both the wave deflector and the 1.2 m high section of SLSC building wall, is provided in Table 5.3.

The total force time series (combined horizontal and vertical) for the wave deflector is provided in Figure 5.7. A timeseries excerpt and an image sequence of the wave deflector F_{max} event are provided in Figure 5.8 and Figure 5.9, respectively. The horizontal force values are positive in the landward (i.e. incident wave) direction. The horizontal force time series for the SLSC building wall is provided in Figure 5.10. A timeseries excerpt and an image sequence of the SLSC building wall F_{max} event are provided in Figure 5.11 and Figure 5.12, respectively.

Following RHDHV's request, WRL conducted a complimentary repeat of Test 10 with the SLSC building wall extended to the wave flume glass wall (i.e., no drainage pathway) to provide a clearer view of the overtopping dynamics against the SLSC building wall during the largest wave loading events. Image sequences provided in Figure 5.9 and Figure 5.12 were captured during this repeat test.

Figure 5.8 F_{max} event (195 kN/m) for the wave deflector

Figure 5.9 Image sequence of the F_{max} event (195 kN/m) at 3,087 s on the wave deflector

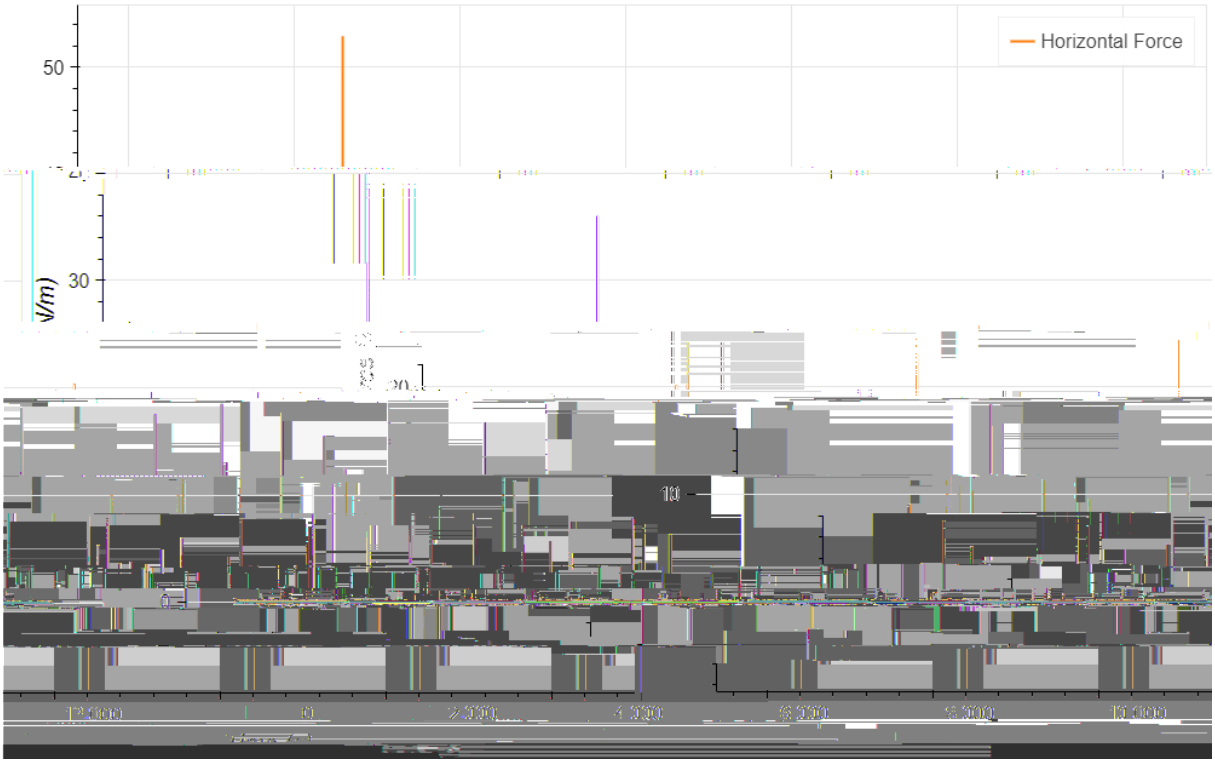

Figure 5.10 Total force timeseries for the 1.2 m high section of SLSC building wall

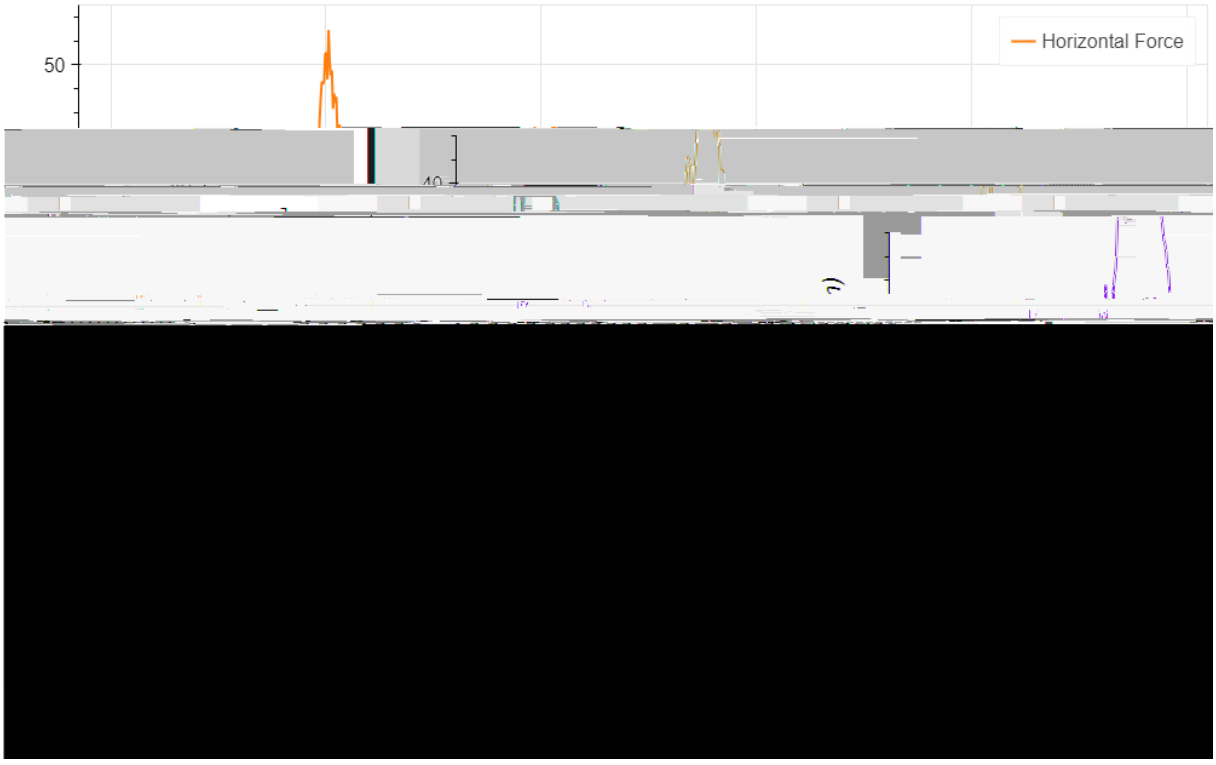

Figure 5.11 F_{max} event (53 kN/m) for the 1.2 m high section of SLSC building wall

Figure 5.12 Image sequence of the Fmax event (53 kN/m) at 2,590 s on the SLSC building wall for the repeat test

6 Summary

6.1 Overview

WRL completed physical modelling for two seawall cross-sections fronting the proposed redevelopment of the Bronte SLSC, including:

Vertical Seawall with Wave Deflector – A vertical seawall with a wave deflector (deflector crest level 5.8 m AHD) and a 3.6 m wide access ramp

7

Mansard, EPD & Funke, ER 1980, 'The Measurement of Incident and Reflected Spectra Using a Least Squares Method', Proceedings of the 17th International Conference on Coastal Engineering,

Appendix A Flume setup – Testing

Appendix B Flume setup – Wave climate calibration

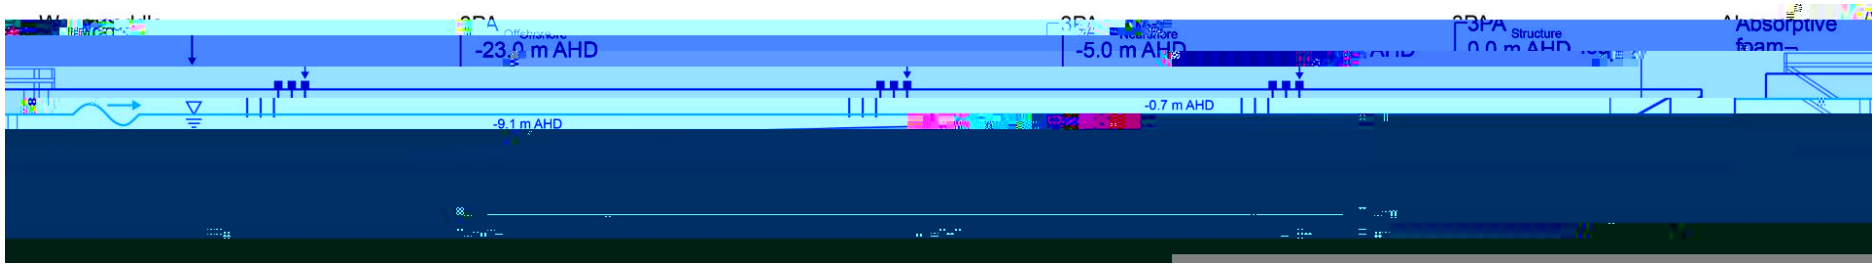

Figure C-2 Stepped Seawall (all dimensions in metres unless otherwise stated)

Appendix D Wave climate calibration

Name	Wave period (s)			Wave height (m)							Wave reflections removed
	T_{p1}	$T_{m_1,0}$	T_z	$H_{1/3}$	H_{m0}	H_{avg}	$H_{10\%}$	$H_{5\%}$	$H_{1\%}$	H_{MAX}	
$X1_{Offshore}$	13.2	14.2	10.6	5.98	5.99	3.71	7.76	8.72	10.44	12.28	
$X2_{Offshore}$	13.2	14.3	10.8	5.93	5.94	3.71	7.66	8.54	10.16	12.20	
$X3_{Offshore}$	13.3	18.2	10.9	5.93	5.92	3.72	7.66	8.62	10.59	12.73	
	13.3	**11.9**	**10.4**	**5.80**	**5.89**	**3.61**	**7.40**	**8.16**	**9.80**	**11.74**	
$X1_{Nearshore}$	13.5	20.0	10.1	3.95	3.82	2.79	4.55	4.82	5.39	5.98	
$X2_{Nearshore}$	13.5	21.1	10.1	3.74	3.64	2.64	4.26	4.50	4.97	5.64	
$X3_{Nearshore}$	13.6	22.6	10.4	3.61	3.50	2.60	4.11	4.36	4.80	5.48	
	13.3	**11.2**	**8.0**	**3.08**	**3.32**	**2.04**	**3.53**	**3.74**	**4.16**	**4.68**	
$X1_{Structure}$	-	-	14.4	0.93	1.17	0.61	1.21	1.39	1.74	2.08	
$X2_{Structure}$	-	-	13.7	0.95	1.22	0.62	1.22	1.37	1.70	1.98	
$X3_{Structure}$	-	-	14.1	0.83	1.06	0.51	1.12	1.28	1.59	1.72	
	-	**-**	**7.2**	**0.60**	**0.69**	**0.34**	**0.78**	**0.88**	**1.06**	**1.44**	

* T_{P1} and $T_{m-1,0}$ at the structure (0 m AHD) not included as a significant portion of broken waves resulted in long wave generation.

	T_{p1}	$T_{m_1,0}$	T_z	$H_{1/3}$	H_{m0}	H_{avg}	$H_{10\%}$	$H_{5\%}$	$H_{1\%}$	H_{MAX}
$X1_{Offshore}$	13.2	14.0	10.7	5.92	5.93	3.70	7.62	8.51	10.17	11.86
$X2_{Offshore}$	13.2	14.0	10.8	5.86	5.88	3.68	7.55	8.42	10.03	12.13
$X3_{Offshore}$	13.3	14.1	10.9	5.87	5.87	3.70	7.56	8.47	10.37	12.79
Offshore	**13.3**	**11.9**	**10.4**	**5.74**	**5.84**	**3.56**	**7.34**	**8.09**	**9.67**	**11.52**
$X1_{Nearshore}$	13.4	17.6	10.0	4.31	4.13	2.96	4.97	5.26	5.80	6.81
$X2_{Nearshore}$	13.4	17.9	9.9	4.10	3.94	2.82	4.70	4.96	5.38	5.95
$X3_{Nearshore}$	13.3	19.0	10.3	3.98	3.84	2.82	4.53	4.81	5.22	5.53
Nearshore	**13.2**	**10.9**	**7.9**	**3.44**	**3.67**	**2.26**	**3.95**	**4.16**		

* T_{P1} and $T_{m-1,0}$ at the structure (0 m AHD) not included as a significant portion of broken waves resulted in long wave generation.

T_{p1}	T

* T_{P1} and $T_{m-1,0}$ at the structure (0 m AHD) not included as a significant portion of broken waves resulted in long wave generation.

	T_{p1}	$T_{m_1,0}$	T_z	$H_{1/3}$	H_{m0}	H_{avg}	$H_{10\%}$	$H_{5\%}$	$H_{1\%}$	H_{MAX}
$X1_{Offshore}$	14.8	15.9	11.7	5.88	5.87	3.65	7.66	8.65	10.64	12.36
$X2_{Offshore}$	14.8	15.9	11.7	5.91	5.86	3.65	7.70	8.69	10.54	12.08
$X3_{Offshore}$	14.9	15.9	11.9	5.96	5.92	3.70	7.70	8.62	10.36	12.16
	14.8	**13.2**	**11.7**	**5.80**	**5.84**	**3.61**	**7.45**	**8.28**	**9.85**	**11.32**
$X1_{Nearshore}$	15.1	18.9	10.1	4.52	4.21	2.92	5.25	5.59	6.22	6.78
$X2_{Nearshore}$	15.0	19.8	10.4	4.35	4.03	2.88	5.04	5.37	5.96	6.50
$X3_{Nearshore}$	15.0	22.4	10.6	4.18	3.89	2.81	4.81	5.08	5.48	6.00
	14.8	**11.8**	**8.1**	**3.44**	**3.69**	**2.21**	**3.94**	**4.15**	**4.56**	**5.01**
$X1_{Structure}$	-	-	9.9	1.55	1.75	0.95	1.93	2.11	2.43	3.00
$X2_{Structure}$	-	-								

* T_{P1} and $T_{m-1,0}$ at the structure (0 m AHD) not included as a significant portion of broken waves resulted in long wave generation.

	Wave period (s)			Wave height (m)						Wave
Name	**T_{p1}**	**$T_{m_1,0}$**	**T_z**	**$H_{1/3}$**	**H_{m0}**	**H_{avg}**	**$H_{10\%}$**	**$H_{5\%}$**	**$H_{1\%}$**	**H_{MAX}**
$X1_{Offshore}$	14.8	15.8	11.8	5.97	5.99	3.73	7.71	8.67	10.56	12.42
$X2_{Offshore}$	14.9	15.8	11.7	5.97	5.95	3.69	7.75	8.70	10.50	12.08
$X3_{Offshore}$	14.9	15.7	11.9	6.00	6.01	3.75	7.72	8.61	10.29	11.83
	14.9	**13.2**	**11.8**	**5.90**	**5.95**	**3.70**	**7.55**	**8.40**	**9.98**	**11.49**
$X1_{Nearshore}$	15.1	17.5	10.7	4.77	4.49	3.15	5.49	5.80	6.48	7.54
$X2_{Nearshore}$	15.0	18.2	10.7	4.61	4.36	3.07	5.28	5.62	6.30	7.59
$X3_{Nearshore}$	15.0	19.2	10.9	4.44	4.19	3.02	5.06	5.33	5.83	6.37
	14.9	**11.7**	**8.3**	**3.79**	**4.01**	**2.43**	**4.33**	**4.56**	**5.00**	**6.15**
$X1_{Structure}$	-	-	10.4	2.06	2.20	1.34	2.49	2.71	3.12	3.86
$X2_{Structure}$	-	-	11.2	1.96	2.07	1.28	2.40	2.60	3.07	3.56
$X3_{Structure}$	-	-	11.0	1.86	1.98	1.19	2.32	2.57	3.05	3.51
	-	**-**	**8.3**	**1.31**	**1.46**	**0.83**	**1.58**	**1.70**	**1.95**	**2.23**

* T_{P1} and $T_{m-1,0}$ at the structure (0 m AHD) not included as a significant portion of broken waves resulted in long wave generation.

	T_{p1}	$T_{m_1,0}$	T_z	$H_{1/3}$	H_{m0}	H_{avg}	$H_{10\%}$	$H_{5\%}$	$H_{1\%}$	H_{MAX}
$X1_{Offshore}$	15.3	17.2	12.1	6.44	6.36	3.96	8.32	9.12	10.83	12.58
$X2_{Offshore}$	15.3	17.2	12.0	6.41	6.32	3.93	8.32	9.18	10.97	12.80
$X3_{Offshore}$	15.3	16.9	12.0	6.46	6.37	3.95	8.36	9.23	11.05	12.65
	15.3	**13.4**	**11.8**	**6.30**	**6.30**	**3.86**	**8.10**	**8.89**	**10.46**	**12.40**
$X1_{Nearshore}$	15.2	20.3	10.9	4.88	4.62	3.25	5.61	5.94	6.53	7.20
$X2_{Nearshore}$	15.1	21.8	11.0	4.71	4.48	3.17	5.43	5.77	6.35	7.39
$X3_{Nearshore}$	15.1	23.7								

* T_{P1} and $T_{m-1,0}$ at the structure (0 m AHD) not included as a significant portion of broken waves resulted in long wave generation.